



The  
Patent  
Office



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

*Evans*

Dated 22 November 1999

---

**THIS PAGE BLANK (USPTO)**

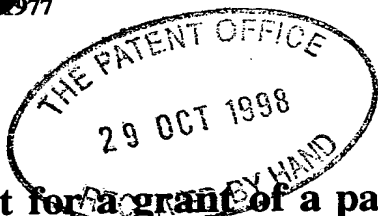

# Request for a grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1.	Your reference	P/5129.GBP		
<hr/>				
2.	Patent application (The Patent Office)	9823749.8	29 OCT 1998	
<hr/>				
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	Imperial College of Science Technology and Medicine Exhibition Road London SW7 2AZ		
	Patents ADP number (if you know it)	4050746001		
	If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		
<hr/>				
4.	Title of the invention	Coating		
<hr/>				
5.	Name of your agent (if you have one)	D YOUNG & CO		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	21 NEW FETTER LANE LONDON EC4A 1DA		
	Patents ADP number (if you have one)	59006		
<hr/>				
6.	If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
		UK	9816348.8	27.7.98
<hr/>				
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 8

Claims(s) 3

Abstract 1

Drawing(s) 6

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

D Young & Co

29.10.98

D YOUNG & CO

Agents for the Applicants

12. Name and daytime telephone number of the person to contact in the United Kingdom

J A Turner

01703 634816

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

COATING

This invention relates to coatings, such as thermal barrier coatings.

In extreme environments such as the interior of a gas turbine engine, where the flame temperature can be greater than the melting point of materials used to construct the engine, metal components are often coated with a material to avoid or reduce thermal damage to the components. Such a coating is commonly known as a thermal barrier coating or TBC.

A thermal barrier coating typically comprises a relatively "thick" layer of a refractory material such as yttria stabilised zirconia or YSZ. Here, the term "thick" is used to imply a thickness of, say, 250 $\mu$ m. The refractory material would generally be selected to have a low thermal conductivity such as around 1 to 3 W/mK, thereby reducing heat transfer to the components and reducing the temperature experienced by the components.

The coatings are applied using a deposition technique. Generally speaking, the deposition techniques in commercial use are not completely reliable and do not provide the level of adhesion of the coating to the component which would be desirable. This means that the lifetime of coated components is limited, but as there is no reliable model for predicting that lifetime, nor way to monitor the coatings in service, the only way to assess the state of coated components is manual inspection. In the case of a gas turbine engine, this is clearly time consuming and expensive.

This invention provides a machine component coated with a coating material, the coating material comprising a mixture of at least a refractory material and an indicator material having an optical emission spectrum which varies in response to a physical parameter of the coated component.

The invention addresses the above difficulties by providing a new type of coating, suitable for use as a thermal barrier coating. The coating itself comprises not only a refractory material but also an indicator material having an optical emission (e.g. fluorescence) spectrum dependent on a physical parameter of the coated component such as temperature. This allows in-situ interrogation and remote

monitoring of the physical parameter by directing a light beam onto the component and analysing the fluorescence spectrum using known analysing equipment.

The variation in spectrum can be, for example, a variation of absolute intensity, relative intensity between two or more emission lines, decay time of one or more  
5 emission lines after excitation by a pulsed light source, or even lineshifting due to expansion and contraction of the host crystal lattice.

The invention has many advantages over a previously proposed technique involving painting special phosphor-loaded paints onto components. Because the indicator material forms part of the coating, it can be much more resistant to erosion  
10 and thermal shock than a surface layer of paint. A separate painting process is not required. Also, the indication given by the indicator material better reflects the true condition of the coated component, rather than just a surface condition of the phosphor paint.

Although coating materials could be selected to respond to other physical  
15 parameters of the coated component, such as pressure, preferred embodiments of the invention finds particular use in allowing remote monitoring of the temperature of the component, by employing an indicator material having a fluorescence spectrum which varies in dependence on the temperature of at least a region of the coated component.

Preferably, rather than a homogeneous layer of indicator material, the indicator  
20 material comprises a layered structure of indicator materials having different respective fluorescence spectra. This arrangement has many advantages. Firstly, as the coating erodes from the component, a further layer of indicator material will be newly uncovered. As this has a distinguishable spectrum, the erosion process can therefore be detected. In another application, the arrangement could allow monitoring of the  
25 component's temperature at different depths within the coating, particularly if lower layers of indicator material were covered by materials which are at least partially transparent to the light involved.

The invention finds a particular preferred use in a combustion engine, preferably in coating one or more turbine blades of a gas turbine engine. In  
30 combustion engines, ambient conditions are extreme and the effort involved in

manually inspecting internal components means that the inspection process can be expensive.

The invention also provides a coating material for coating a machine component, the coating material comprising a mixture of at least a refractory material and an indicator material having an optical emission spectrum which varies in response to a physical parameter of the coated component.

The invention also provides a combustion engine having one or more internal components coated with the above, the engine having a measurement system comprising a light source for directing an interrogating light beam onto the coated component(s); and a light collector for collecting light from the coated component(s).

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram of a coated component;

Figure 2 is a schematic diagram of a gas turbine engine incorporating a coated component and having a remote sensing apparatus;

Figure 3 illustrates a fluorescence spectrum for YAG:Tb;

Figures 4 and 5 illustrate the variation of decay lifetime with temperature for an emission of YAG:Tb;

Figure 6 illustrates a fluorescence spectrum for  $Y_2O_3:Eu$ ;

Figures 7 and 8 illustrate the variation of decay lifetime with temperature for an emission of  $Y_2O_3:Eu$ ;

Figures 9 and 10 illustrate the relative variation of emission linestrengths with temperature for YAG:Dy;

Figure 11 is a schematic diagram of a multi-layer indicator material providing erosion information; and

Figure 12 is a schematic diagram of a multi-layer indicator material providing temperature monitoring at different coating depths.

Figure 1 is a schematic diagram of a component 10 coated with a thermal barrier coating (TBC) 20. The component 10 may be, for example, a turbine blade of a

gas turbine engine, although the technique is applicable to many other types of component.

5 The TBC 20 is formed as a mixture of a refractory material and an indicator material which has a fluorescence spectrum which varies in dependence on a physical parameter of the component such as temperature.

The coated component is particularly suited for remote monitoring of the physical parameter by directing an interrogating light beam on to the component and then analysing the fluorescence emissions returned from the component. Figure 2 is a schematic diagram of a gas turbine engine incorporating the coated component and  
10 employing a remote sensing apparatus to detect the fluorescence spectrum of the component.

In Figure 2, the coated component 10 is mounted on a turbine assembly 30 inside a casing 40 of the gas turbine engine. An interrogating light beam is generated by an Nd:YAG pulsed laser 50 and directed along an optical fibre waveguide 60 to a  
15 window 70 in the casing 40 of the turbine engine, from where it is directed onto the path of the component under test.

When the light strikes the component as it rotates past the window 70, the component's coating emits a fluorescence spectrum which is picked up by a further optical fibre 80 through a further window 90 in the casing 40. The light is passed to a  
20 detector 100.

An arrangement of lenses (not shown) can be used to collimate or otherwise vary the optical properties of the interrogating beam and/or the fluorescence emission. The optical fibre 60 and the optical fibre 80 can direct light through the same window in the casing 40 if desired, and, through use of a directional optical fibre coupler, the  
25 interrogating beam and the collected fluorescence spectrum can pass along the same fibre.

The laser 50 and the detector 100 are under the control of a pulse generator and control circuit 110. The detector 100 converts the received optical signal into an electrical signal 120 which is passed to an analyser 130 arranged to detect spectral  
30 characteristics to be described below using known analysis techniques. The output of



the analyser 130 is passed to an output device 140 such as a display screen or a print-out device.

The TBC is applied using a known technique such as chemical vapour deposition (CVD), electron beam physical vapour deposition (EBPVD), plasma spray  
5 deposition or electrostatic assisted vapour deposition (see, for example, WO97/21848). In this last technique, a precursor solution is directed onto the substrate (the component) and forms a deposited layer under heat treatment.

The layer used in these embodiments is formed primarily of a refractory material but containing dopants, such as rare earth dopants, to provide the required  
10 fluorescence properties. Therefore, a straightforward way of applying such a coating is to add the rare earth dopants to the precursor solution before the electrostatic assisted vapour deposition coating process takes place. In further embodiments to be described below (see Figures 11 and 12) the composition of the indicator component varies across the depth of the coating. This can be achieved easily by varying the  
15 composition of the precursor solution during the coating process - perhaps by changing the concentration of a particular dopant by adding the dopant or adding more undoped precursor solution, or by changing from one receptacle of solution having a first dopant to another receptacle of solution having a second dopant (or no dopant), and so on. In the examples discussed below, the proportion of the dopant in the deposited  
20 layer is relatively small, so that the physical properties of the deposited layer and the deposition process itself are relatively unchanged by the addition of the dopant.

Two main techniques for assessing temperature by interrogating the coated components' fluorescence spectrum will be discussed below. These are a life time decay method and an intensity ratio method.

25 For the purposes of this example, three compositions will be discussed.  $\text{Y}_2\text{O}_3:\text{Eu}$  and  $\text{YAG}:\text{Tb}$  are described for the "lifetime decay method". These materials show good luminescence, are readily available and relatively cheap. Their useable temperature range goes from below  $550^\circ\text{C}$  to above  $1200^\circ\text{C}$ .

The "intensity ratio method" will be described with relation to  $\text{YAG}:\text{Dy}$   
30 material. This material has the possibility of performing two dimensional temperature

distribution analysis up to temperatures of about 1500°C. Because the main emission lines of interest are below 500nm, at high temperatures black body radiation from material is still not as intense as for similar measurements with Y<sub>2</sub>O<sub>3</sub>:Eu and YAG:Tb.

## 5 Lifetime Decay Method

Figure 3 is a graph of the emission spectrum for YAG:Tb at different temperatures in response to an excitation wavelength of 266nm. It will be seen that the spectrum varies in magnitude with temperature. However, the feature that will be analysed in the present example is the decay time of an emission after excitation.

10 When the material is excited by a pulse from the pulsed laser 50, it starts to fluoresce and emit the spectrum shown in Figure 3. When the excitation pulse is removed, the intensity dies away exponentially. A characteristic time (tau) of the decay process is the time in which the intensity falls to 1/e of its original intensity. So, tau becomes numerically smaller as the decay becomes faster.

15 Figure 4 is a graph of the decay time tau versus temperature for YAG:Tb at an emission wavelength of 543.1nm, an excitation wavelength of 266nm, and a Tb concentration of 5%, over a range from substantially room temperature through to about 1000°C. It can be seen that the characteristic time tau varies in dependence on the temperature of the material.

20 Figure 5 is an expanded graph of the region from about 700°C to about 1000°C. This is a region of interest for the temperature analysis of components in a combustion engine, and the graph shows that there is a generally monotonic between tau and temperature. Accordingly, the detector 100 can be arranged to detect intensity of the optical signal returned from the component 10 (Figure 2) and the analyser 130 can be  
25 arranged to detect the characteristic decay time, i.e. the time in which the intensity decays by a factor of 1/e. This can then be compared - for example via a look-up table - with the results of Figure 5 to determine the temperature of the component 10.

Figure 7 illustrates the exponential decay process for an emission from Y<sub>2</sub>O<sub>3</sub>:Eu with temperature. The concentration of Eu is 6%, although a range of 1-6%  
30 is useful, the excitation wavelength 266nm and the emission is measured is at 611nm.

When the results of Figure 7 are converted into a graph of the characteristic decay time  $\tau$  versus temperature, it can be seen that in a temperature range of interest (above 700°C) there is a useful variation of  $\tau$  with temperature. This information can be used as described above in the analyser 130 of Figure 2.

## 5 Intensity Ratio Method

Figure 9 illustrates the scaled fluorescence spectrum for YAG:Dy at different temperatures. (The spectrum includes two "rogue" data points, marked as "dead pixels"). The Dy concentration is 3%.

10 In a steady state emission (not a fluorescence emission), the ratio of intensities for two emission wavelengths (493nm and 455nm) in response to excitation at 355nm is plotted against ambient temperature of the coated component in Figure 10. This shows a useful, almost linear relationship between the ratio and the temperature.

In Figure 10, sets of results obtained on different days are shown. These are day "j9th", the day of fabrication, and the next three days j10th to j12th. The results  
15 show a good stability of response with time.

The examples described above have related to single-layer coatings. However, as mentioned earlier, the composition of the indicator material can be varied during deposition of the TBC so as to give a TBC having multi-layer properties as regards the indicator material but single-layer properties as regards the thermal barrier protection.  
20 Figures 11 and 12 schematically illustrate two examples of such a multi-layer indicator structure.

Referring to Figure 11, the component 10 is coated with a TBC 200 having three indicator layers within it, 210, 220, 230. The three indicator layers are formed using different indicator dopants.

25 This technique is very useful to assess erosion of the TBC. In Figure 11, erosion has taken place at a site 240, so that areas of the interior indicator layers 220, 210 are exposed. When the eroded component is interrogated using the light beam as described above, emission spectra will be observed corresponding to all three of the indicator 210, 220, 230. This can be used to indicate that erosion has taken place as far  
30 as the layer 210. When this occurs, a warning signal can be issued to the equipment

operator (e.g. a maintenance engineer maintaining a gas turbine engine) that it is time to dismantle the engine to replace the eroded component.

Figure 12 illustrates a similar multi-layer structure having a three-indicator layer TBC formed of indicator layers 250, 260, 270. The three layers again have different respective fluorescence properties when interrogated by the interrogating light beam. A region 280 of the outer layer 270 is arranged to be substantially transparent (or at least partially transparent to the interrogating wavelength and the emission spectrum. This allows the temperature at a position inside the TIC (the position of the indicator layer 260 to be monitored. Similarly, a region 290 of the outer two layers 270, 260 is made at least partially transparent, so that the temperature of the interior layer 250 can be assessed, giving a closer indication of the temperature of the component 10 itself.

Such a multi-layer structure will also enable the heat flux to the component to be calculated assuming that the thermal conductivity of the intervening layer is known:

$$q'' = (-k \Delta T) / L$$

where  $k$  is thermal conductivity,  $\Delta T$  is the temperature change and  $L$  is the thickness of the layer.

In other embodiments a compositionally graded structure can be used (by varying the indicator material composition and/or concentration during deposition), or alternatively a composite or multi-phase structure can be employed.

Embodiments of the invention can provide a TBC with indicating properties which can be used to assess or measure the erosion, temperature distribution, heat flux, phase changes, pressure, stress and/or strain characteristics of a coated component, besides performing as a TBC.

The concentration of the indicator material is preferably relatively low so that its presence has little effect on the thermal properties of the TBC, but preferably high enough that the spectra can be conveniently observed. A preferred range is about 0.1%-10%, although concentrations outside of that range can be envisaged.

CLAIMS

1. A machine component coated with a coating material, the coating material comprising a mixture of at least a refractory material and an indicator material having a optical emission spectrum which varies in response to a physical parameter of the  
5 coated component.
2. A component according to claim 1, the indicator material having a optical fluorescence emission spectrum which varies in response to a physical parameter of the coated component.
- 10 3. A component according to claim 1 or claim 2, in which the indicator material has an emission spectrum which varies in dependence on the temperature of at least a region of the coated component.
- 15 4. A component according to claim 1, in which the indicator material has an emission spectrum which varies in dependence on at least one parameter selected from the group consisting of:
- (i) a physical strain applied to at least a region of the coated component;
  - (ii) erosion of at least a region of the coated component;
  - 20 (iii) a physical stress of at least a region of the coated component;
  - (iv) a physical strain applied to at least a region of the coated component.
5. A component according to any one of claims 1 to 4, in which the refractory material is selected from the group consisting of yttria stabilised zirconia and yttria  
25 aluminium garnet.
6. A component according to any one of the preceding claims, in which the indicator material is a phosphor material.

7. A component according to any one of the preceding claims, in which the indicator material comprises a rare earth dopant.

8. A component according to claim 7, in which the indicator material comprises a  
5 dopant selected from the group consisting of terbium, europium and dysprosium.

9. A component according to any one of the preceding claims, in which the indicator material comprises a layered structure of indicator materials having different respective emission spectra.

10

10. A component according to any one of claims 1 to 8, in which the indicator material comprises a compositionally graded structure, a composite structure or a multi-phase structure.

15 11. A component according to any one of the preceding claims, the component being a component of a combustion engine.

12. A component according to claim 11, the component being a component of a  
gas turbine engine.

20

13. A component according to claim 12, in which the component is a turbine blade.

14. A coating material for coating a machine component, the coating material comprising a mixture of at least a refractory material and an indicator material having  
25 an optical emission spectrum which varies in response to a physical parameter of the coated component.

15. A combustion engine having one or more internal components coated with a coating according to claim 14, the engine comprising:

a light source for directing an interrogating light beam onto the coated component(s); and

a light collector for collecting light from the coated component(s).

- 5 16. An engine according to claim 15, comprising an analyser for detecting a physical property of the coated component(s) by analysis of light collected from the component(s).
- 10 17. A coated component substantially as hereinbefore described with reference to the accompanying drawings.
18. A coating material substantially as hereinbefore described with reference to the accompanying drawings.
- 15 19. A combustion engine substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT

COATING

A coating material 20 for coating a machine component 10 comprises a mixture of at least a refractory material and an indicator material having an optical emission  
5 (e.g. fluorescence) spectrum which varies in response to a physical parameter of the coated component.

Figure 1.

---

THIS PAGE BLANK (USPTO)



1/6

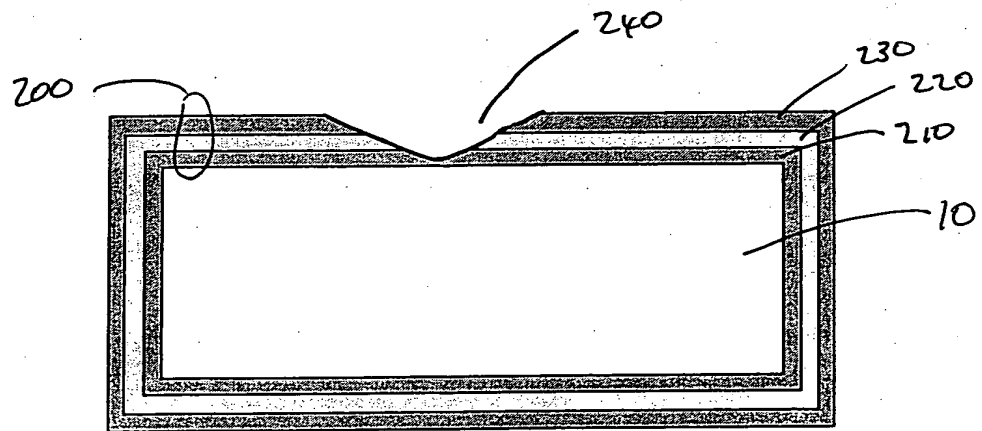
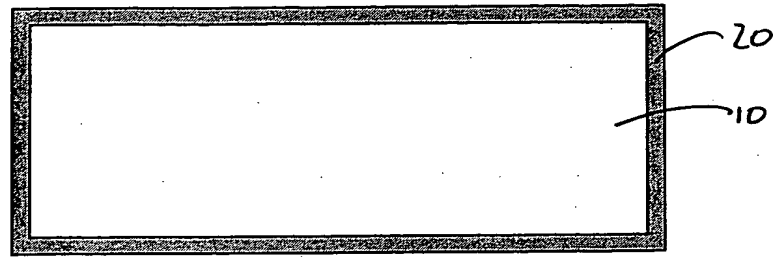


Fig. 11

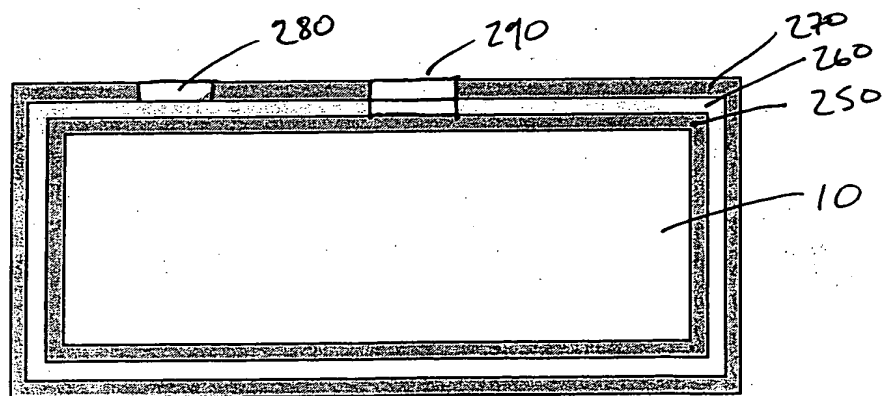
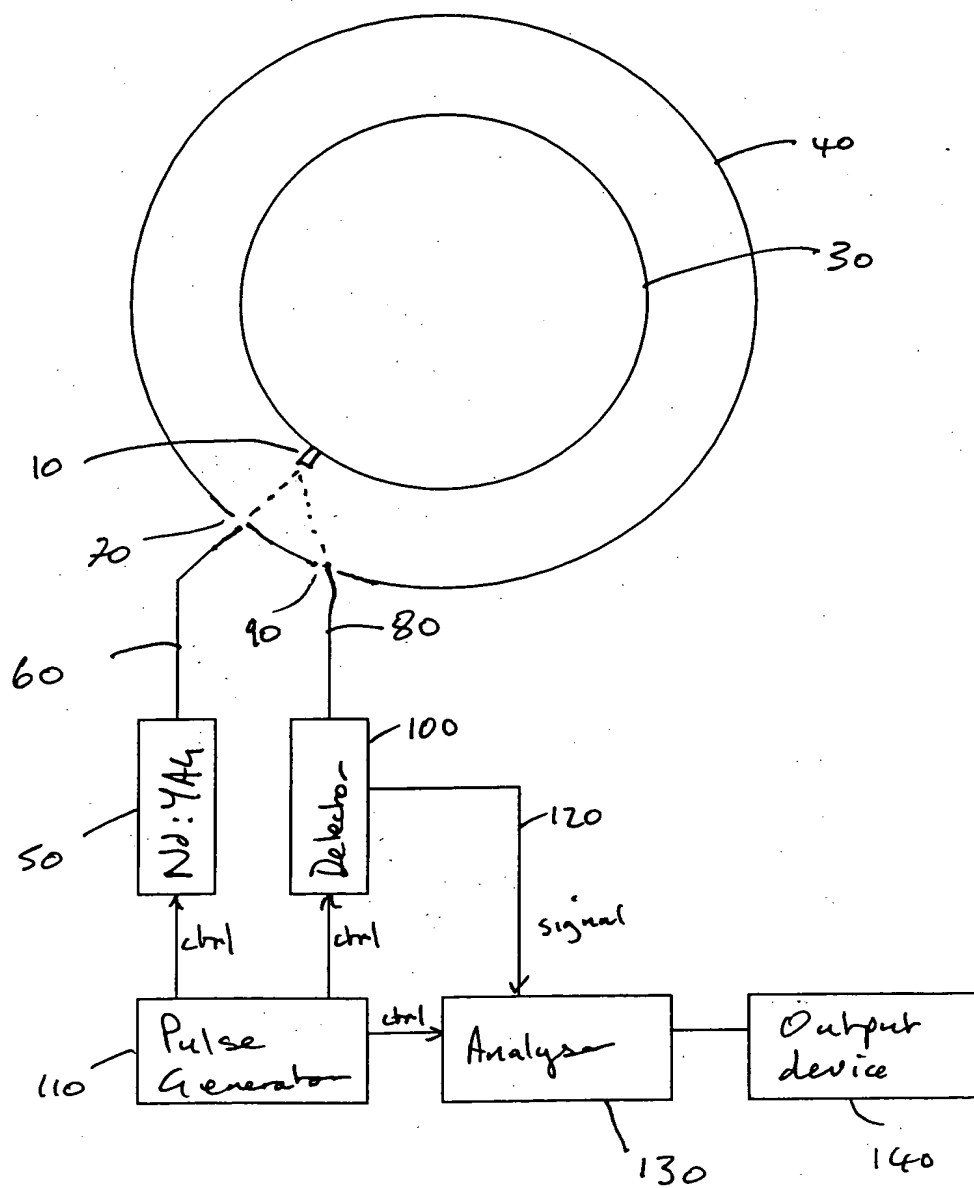


Fig. 12

**THIS PAGE BLANK (USPTO)**

FIG. 2

**THIS PAGE BLANK (USPTO)**

---

3/6

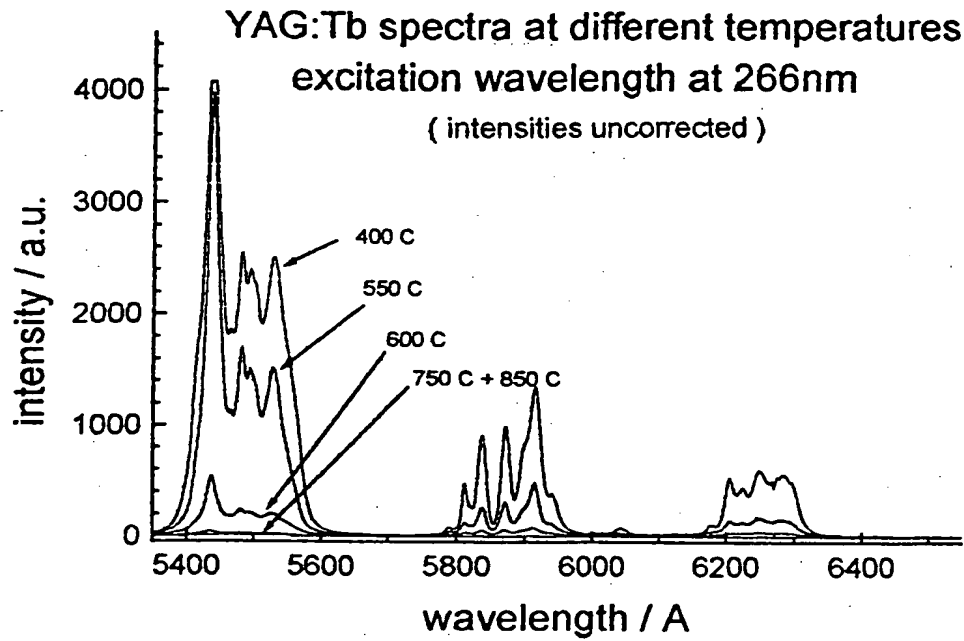


Fig. 3

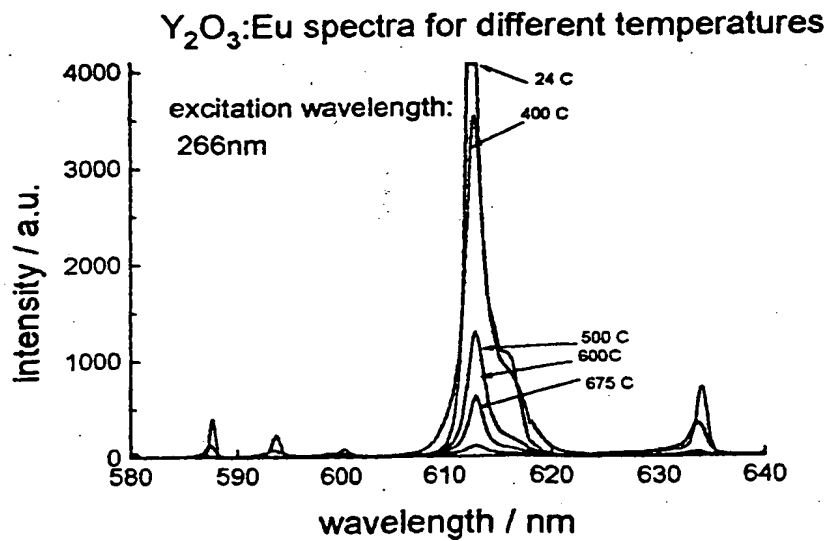


Fig. 6

**THIS PAGE BLANK (USPTO)**

---

4/6



Fig. 4


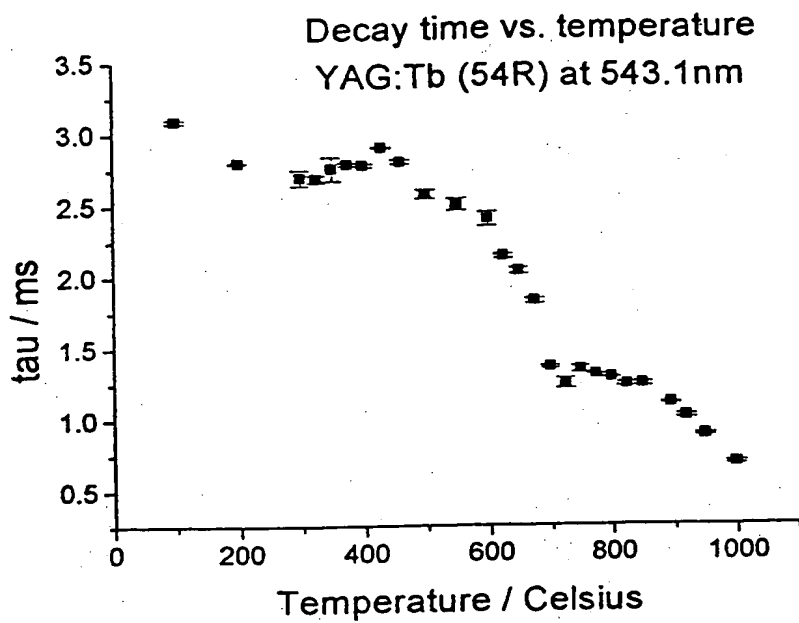


Fig 5



**THIS PAGE BLANK (USPTO)**

---

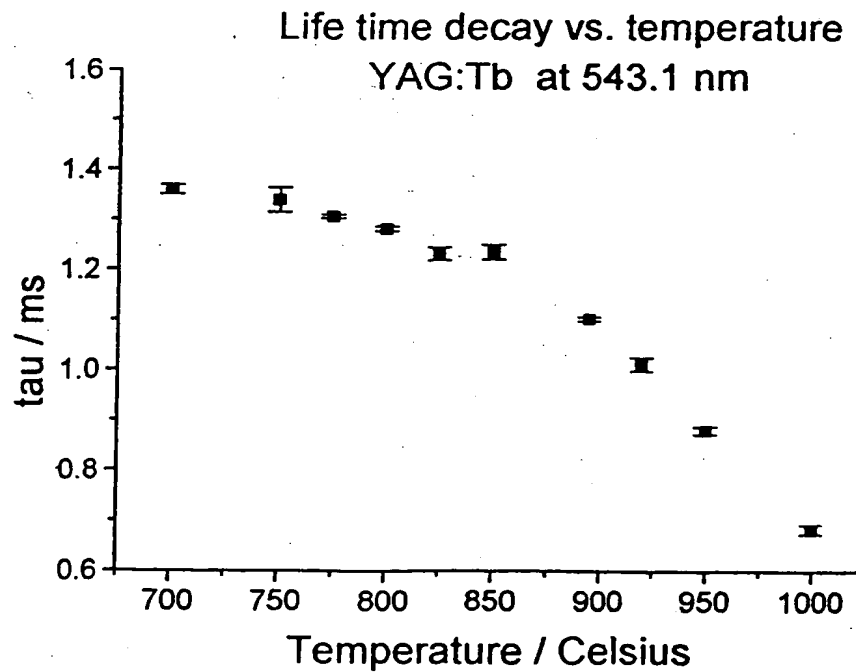

5/6

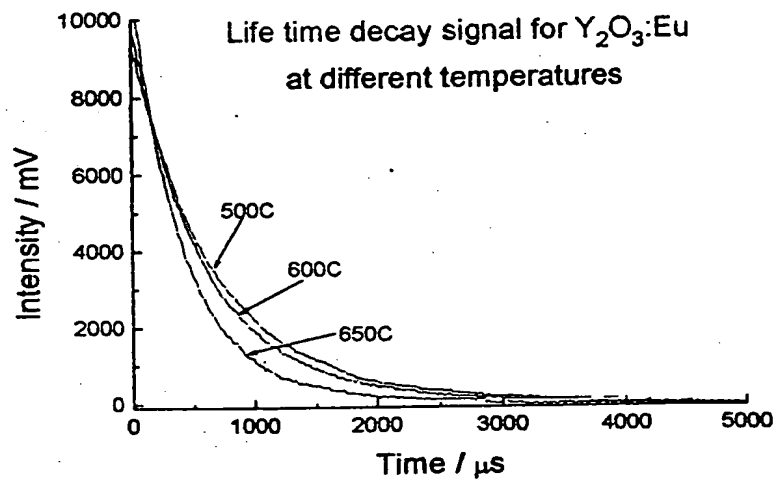


Fig. 7

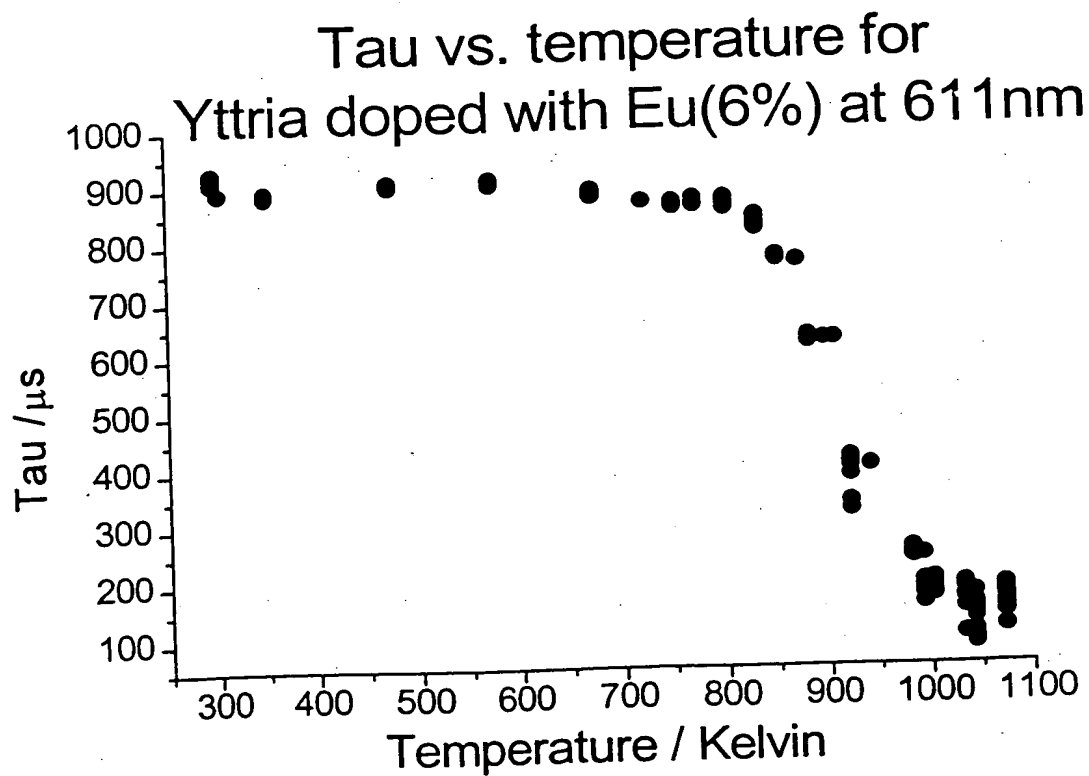


Fig. 8

**THIS PAGE BLANK (USPTO)**

---

6/6

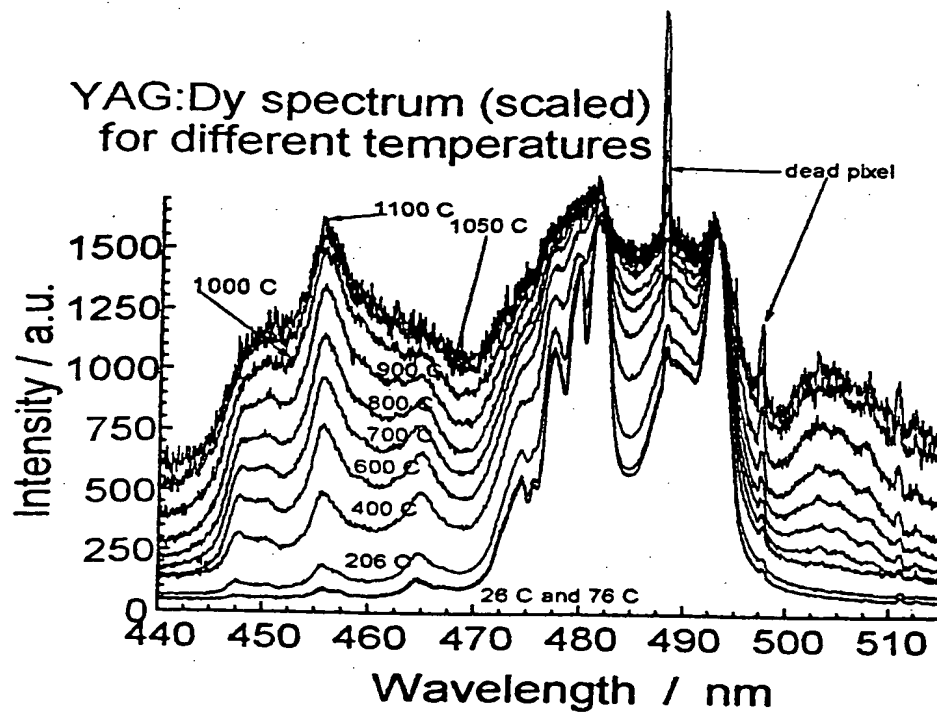


Fig. 9

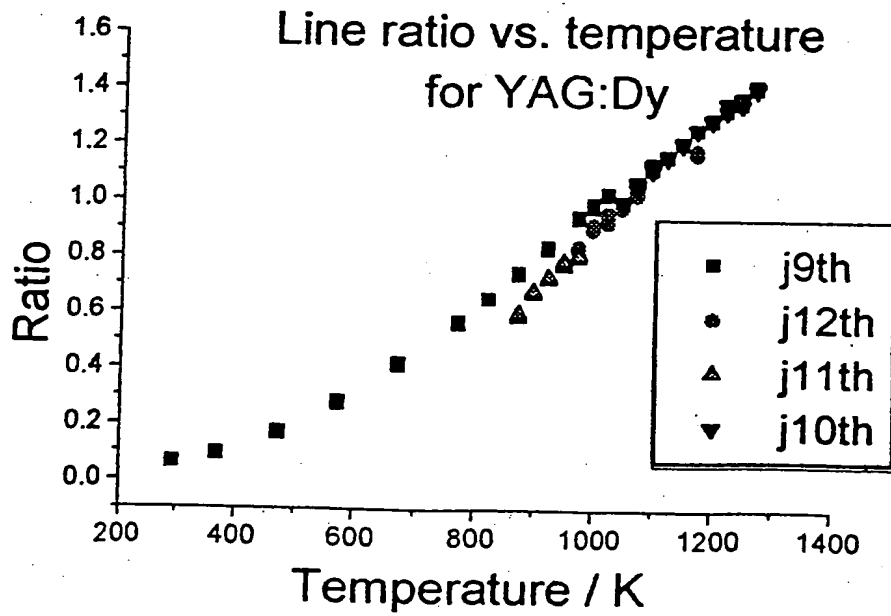


Fig. 10

GB99 | 02413

23/77 lost in office

D. Young + Co